



TNMK / STNMK / TNMK-A


Vertical lifting without marking, scratching or damaging the material surface without minimum WLL

Application:

- For vertical lifting, transporting and turning of all plates and structures without marking, scratching and or damaging the material surface
- Perfect for lifting materials such as (stainless) steel, aluminum, nature stone, composite, painted materials, wood, glass, plastic, etc.
- Jaw openings available from: 0 to 60 mm
- STNMK types are supplied with enlarged jaw opening: 17 to 37 mm
- TNMK-A types are supplied with adjustable extra large jaw opening: 0 to 180 mm (A) (adjustable steps of 20 mm)
- Working load limit (WLL) 500 - 3000 kg.
- No min. WLL

Features and Benefits:

- With 2 special synthetic anti-friction pads to guarantee non-marking
- Supplied with chain lifting shackle for flexible lifting
- Always equipped with a safety mechanism, ensuring the clamp does not slip when lifting force is applied and when load is being lowered
- Clamp is locked in closed as well as open position
- Lightweight, maintenance-friendly, heavy duty body

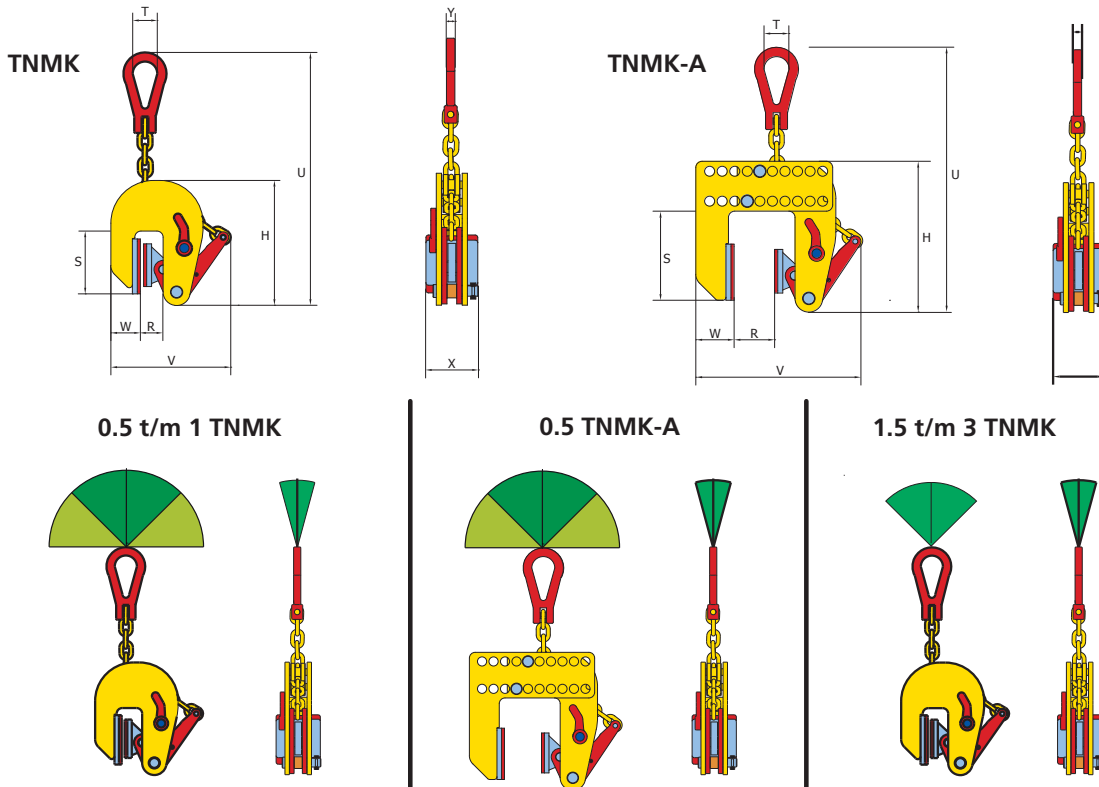

| Article Nr. | Type | Capacity (kg/pc) | Jaw opening (R) (mm) | Dimensions in mm | | | | | | | | Weight (kg/pc) |
|-------------|------------|------------------|----------------------|------------------|-----|----|-----|---------|----|----|----|----------------|
| | | | | H | S | T | U | V | W | X | Y | |
| 862035 | 0.5 TNMK | 500 | 0 - 20 | 205 | 102 | 40 | 462 | 224 | 48 | 80 | 14 | 6 |
| 862135 | 0.5 STNMK | 500 | 17 - 37 | 205 | 102 | 40 | 462 | 241 | 48 | 80 | 14 | 6 |
| 862005 | 0.5 TNMK-A | 500 | 0 - 180 | 242 | 143 | 40 | 410 | 235-395 | 61 | 80 | 14 | 10 |
| 862010 | 1 TNMK | 1000 | 0 - 30 | 232 | 105 | 40 | 470 | 282 | 46 | 80 | 14 | 6,5 |
| 862037 | 1.5 TNMK | 1500 | 0 - 40 | 232 | 105 | 40 | 470 | 282 | 46 | 80 | 14 | 6,5 |
| 862038 | 2 TNMK | 2000 | 0 - 50 | 362 | 124 | 50 | 704 | 408 | 63 | 80 | 18 | 15 |
| 862039 | 3 TNMK | 3000 | 0 - 60 | 362 | 124 | 50 | 704 | 408 | 63 | 80 | 18 | 15,5 |