




lifting eye nut DIN 582

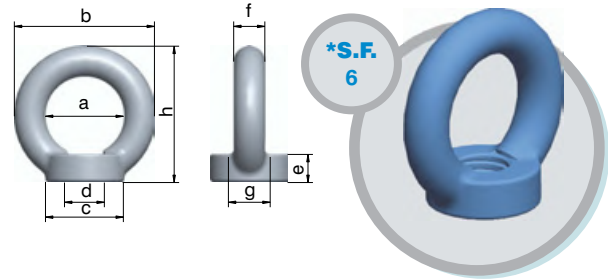

GOLFARE FEMMINA DIN 582 - LIFTING EYE NUT DIN 582

a	b	c	e	f	g	h	SWL 90°	SWL 45°
mm	mm	mm	mm	mm	mm	mm	kg	kg
20	36	20	8,5	8	10	36	90	60
20	36	20	8,5	8	10	36	140	100
25	45	25	10	10	12	45	230	170
30	54	30	11	12	14	53	340	240
30	54	30	11	12	14	53	500	350
35	63	35	13	14	16	62	700	500
35	63	35	13	14	16	62	930	650
40	72	40	16	16	19	71	1200	860
40	72	40	16	16	19	71	1500	1050
50	90	50	20	20	24	90	1800	1290
54	98	62	22	22	26	99	2500	1830
60	108	65	25	24	28	109	3200	2300
60	108	65	25	24	28	109	4200	3050
70	126	75	30	28	32	128	4600	3300
80	144	85	35	32	38	147	6000	4400
80	144	85	35	32	38	147	6300	4500
90	166	100	40	38	46	168	7800	5500
90	166	100	40	38	46	168	8600	6100
100	184	110	45	42	50	187	9900	7100
100	184	110	45	42	50	187	11500	8300
110	206	120	50	48	58	208	16000	11000
140	260	150	60	60	72	260	20000	14000
-	-	-	-	-	-	-	28000	20000
-	-	-	-	-	-	-	38000	27000

* Coefficiente di sicurezza_Safety factor