


Brache intrecciate in fune acciaio Lucido o Zincato ANIMA METALLICA
Galvanized or Ungalvanized Twisted steel wire rope sling with steel core



Fattore modale
Design factor

Ø fune wire rope Ø	Portata (CMU) (kg) Capacity (WLL) (kg)				Asole Soft eyes Ax B	Larghezza minima Shortest width C	Spessore Thickness E
	1	2	1,4	1			
	kg	kg	kg	kg	mm	mm	kg
4	1000	2000	1400	1000	96x192	50	9
5	2000	4000	2800	2000	120x240	65	11
6	3000	6000	4200	3000	144x288	85	15
8	5000	10000	7000	5000	192x384	110	18
9	7500	15000	10500	7500	216x432	130	22
10	10000	20000	14000	10000	240x480	150	26
12	14000	28000	19600	14000	288x576	180	31
14	19000	38000	26600	19000	336x672	210	37
16	25000	50000	35000	25000	384x768	240	42
18	32000	64000	44800	32000	432x864	270	47
21	39000	78000	54600	39000	504x1008	300	52

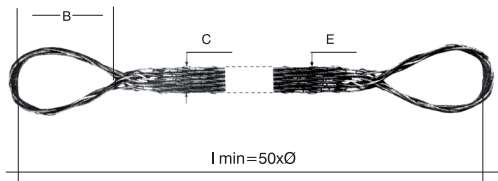

AA TREX
Braca intrecciata con asole
Interwine sling with soft eyes

* D ≥ 20xØ

Caratteristiche prodotto
Braca intrecciata in fune acciaio 6 trefoli -
classe 216 fili WS - ANIMA METALLICA

Descrizione
Brache intrecciate realizzate con 12 funi in acciaio
anima metallica

Coefficiente di sicurezza
5:1 (indicato per usi generali nel sollevamento
di cose e materiali)

Certificazione del prodotto
Dichiarazione di conformità "CE" EN 10204 in accordo
direttiva macchine 2006/42/CE

Product feature
Galvanized or Ungalvanized Twisted steel wire rope sling
with steel core

Description
Twisted Galvanized or Ungalvanized steel wire rope sling
with steel core with soft eyes on both ends

Safety Factor
5:1 (for general lifting purposes)

Product Certificate
"EC" Declarations of conformity EN 10204
acc to Directive Machinery 2006/42/EC