




Swivel Self Locking Hook. Code "YE "

with Brass Bushing

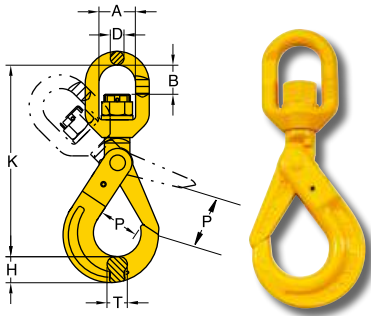


Item No.	Working Load Limit tonnes*	For Grade 80 Chain mm	Dimensions (mm)							N.W. kg
			A	B	D	H	K	P	T	
8-027-06	1.12	6	31	22	12	19	149	29	15	0.7
8-027-07	2.0	7, 8	36	29	14	24	186	34	20	1.2
8-027-10	3.15	10	40	34	16	30	220	44	26	2.0
8-027-13	5.3	13	46	43	22	39	267	52	30	4.1
8-027-16	8.0	16	60	50	24	49	328	60	36	7.2
8-027-20	12.5	18, 20	75	82	26	62	388	90	48	11.5
8-027-22	15.0	22	97	95	33	63	457	80	49	18.6
8-027-26	21.2	26	123	115	42	69	535	99	56	31.9

★ Design factor 4:1 proof tested and certified
Tested acc. to EN 1677

⚠ **WARNING INFORMATION:** This hook is a positioning device and is not intended to rotate under load. For swivel hooks designed to rotate under load, see p.129 8-027N .

Swivel Self Locking Hook. Code "YEN"


with Ball Bearing, which performs full swivel underload

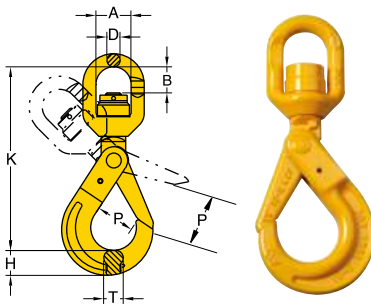

Item No.	Working Load Limit tonnes*	For Grade 80 Chain mm	Dimensions (mm)							N.W. kg
			A	B	D	H	K	P	T	
8-027N-06	1.12	6	31	22	12	19	149	29	15	0.7
8-027N-07	2.0	7, 8	36	29	14	24	186	34	20	1.2
8-027N-10	3.15	10	40	34	16	30	220	44	26	2.0
8-027N-13	5.3	13	46	43	22	39	267	52	30	4.2
8-027N-16	8.0	16	60	50	24	49	328	60	36	7.3
8-027N-20	12.5	18, 20	75	82	26	62	388	90	48	11.7
8-027N-22	15.0	22	97	95	33	63	457	80	49	18.0
8-027N-26	21.2	26	123	115	42	69	535	99	56	32.0

★ Design factor 4:1 proof tested and certified
Tested acc. to EN 1677

Shank Self Locking Hook. Code "YEA"

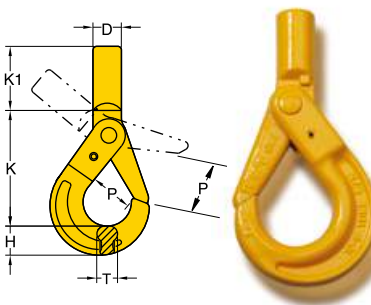

Item No.	Working Load Limit tonnes*	Shank		Dimensions (mm)					N.W. kg
		D	d min**	H	K	K1	P	T	
8-024-06	1.12	21	11	19	90	37	29	15	0.5
8-024-07	2.0	25	13	24	115	43	34	20	0.9
8-024-10	3.15	29	16	33	135	48	44	26	1.5
8-024-13	5.3	34	20	39	171	64	52	30	3.0
8-024-16	8.0	37	25	49	204	75	60	36	5.5
8-024-20	12.5	43	38	62	219	90	90	48	9.0
8-024-22	15.0	51	45	63	251	115	80	49	12.0
8-024-26	21.2	65	50	69	271	151	99	56	18.0

** d min. = the smallest shank dimension after machining.

Note: After machining the shank, proof loading must be carried out.

★ Design factor 4:1