




Connecting Link Code " YA "

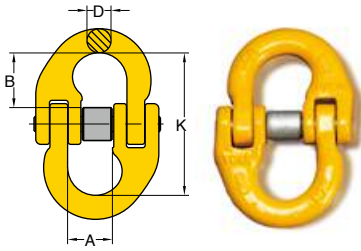

ABS
Type Approval

Item No.	Working Load Limit tonnes*	For Grade 80 Chain mm	Dimensions (mm)				N.W. kg
			A	B	D	K	
8-015-05	0.8	5	10	13	6	35	0.04
8-015-06	1.12	6	15	17	7	44	0.08
8-015-07	2.0	7, 8	18	22	9	57	0.2
8-015-10	3.15	10	25	26	11	68	0.3
8-015-13	5.3	13	30	35	16	91	0.7
8-015-16	8.0	16	36	38	19	100	1.1
8-015-20	12.5	18, 20	42	46	22	122	1.9
8-015-22	15.0	22	49	59	24	152	3.0
8-015-26	21.2	26	55	62	30	162	5.0
8-015-32	31.5	32	69	79	36	202	9.0


★ Design factor 4:1 proof tested and certified
Tested acc. to EN 1677

Connecting Link

Dacromet® Surface Finish.**



special pin and sleeve
designed for more
often re-use purpose.

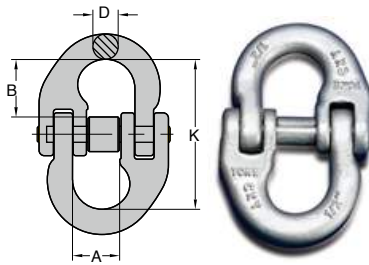


ABS
Type Approval

Item No.	Working Load Limit tonnes*	For Grade 80 Chain mm	Dimensions (mm)				N.W. kg
			A	B	D	K	
8-M015-06	1.12	6	15	17	7	44	0.16
8-M015-07	2.0	7, 8	18	22	9	57	0.16
8-M015-10	3.15	10	25	26	11	68	0.3
8-M015-13	5.3	13	30	35	16	91	0.7
8-M015-16	8.0	16	36	38	19	100	1.2
8-M015-20	12.5	18, 20	42	46	22	122	1.9
8-M015-22	15.0	22	49	59	24	152	3.0
8-M015-26	21.2	26	55	62	30	162	4.6
8-M015-32	31.5	32	69	79	36	202	8.5

★ Design factor 4:1 proof tested and certified
Tested acc. to EN 1677

Omega Link. Code "YO"

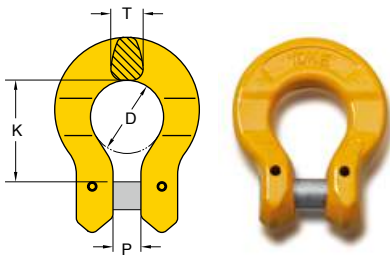

Item No.	Working Load Limit tonnes*	For Grade 80 Chain mm	Dimensions (mm)				N.W. kg
			D	K	P	T	
8-018-06	1.12	6	21	30	8	9	0.1
8-018-07	2.0	7, 8	27	36	9	11	0.2
8-018-10	3.15	10	32	44	12	15	0.4
8-018-13	5.3	13	42	55	16	17	0.8
8-018-16	8.0	16	50	69	18	22	1.6
8-018-20	12.5	18, 20	58	71	21	28	2.1

★ Design factor 4:1 proof tested and certified
Tested acc. to EN 1677

