



FHX-V

User-friendly horizontal clamp where the torsion spring ensures that the clamp stays in position after it has been set in place


Application:

- For horizontal lifting and transporting of steel plates and other non-deflecting materials
- Terrier FHX-V lifting clamps must always be used in pairs (or multiple pairs)
- Jaw openings available from: 0 to 60 mm
- Working load limit (WLL) 1000 - 6000 kg



Features and Benefits:

- Pre-tensioned spring cam feature for easy single operator usage
- Clamp can be closed and fixed on any desired spot
- Compact and lightweight design for easy handling
- Tough quality heavy duty welded body

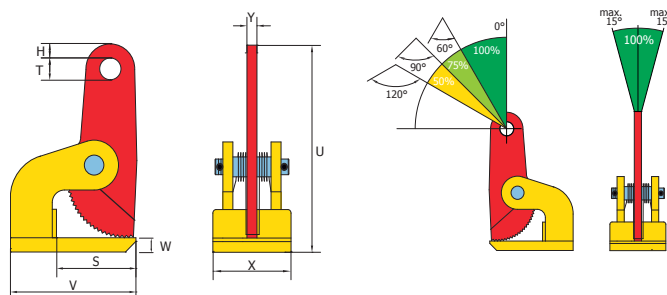

Article Nr.	Type	Capacity (kg/pair)	Jaw opening (R) (mm)	Dimensions in mm								Weight (kg/pc)
				V	S	W	T	H	U	X	Y	
953101	1 FHX-V	1000	0 - 35	140	99	10	26,5	12	188	85	15	3
953201	2 FHX-V	2000	0 - 60	180	114	15	30,5	19	286	125	16	8
953301	3 FHX-V	3000	0 - 60	200	125	20	30,5	19	302	140	20	12,2
953401	4 FHX-V	4000	0 - 60	220	139	30	30,5	19	316	165	20	17
953601	6 FHX-V	6000	0 - 60	220	139	30	30,5	19	316	165	20	17