




## How to use YOKE Self Locking Hook?



Push trigger to open Hook



## Eye Self Locking Hook. Code "YC"

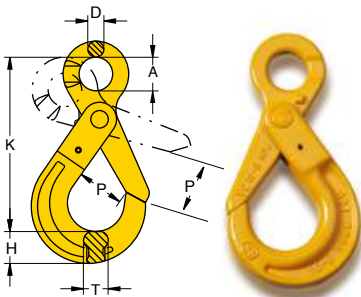


**ABS**

Type Approval

Item No.	Working Load Limit tonnes*	For Grade 80 Chain mm	Dimensions (mm)						N.W. kg
			A	D	H	K	P	T	
8-025-06	1.12	6	21	10	19	110	29	15	0.5
8-025-07	2.0	7,8	25	11	24	136	34	20	0.8
8-025-10	3.15	10	32	13	30	167	44	26	1.4
8-025-13	5.3	13	40	16	39	207	52	30	3.0
8-025-16	8.0	16	52	21	49	252	60	36	5.8
8-025-20	12.5	18, 20	64	23	62	282	90	48	8.5
8-025-22	15.0	22	70	24	63	319	80	49	12.5
8-025-26	21.2	26	80	25	69	343	99	56	14.0
8-025-28	25.0	28	90	28	81	401	120	63	26.0

★ Design factor 4:1 proof tested and certified  
Tested acc. to EN 1677

## Clevis Self Locking Hook. Code "YD"

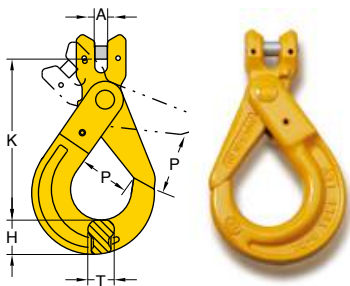

Item No.	Working Load Limit tonnes*	For Grade 80 Chain mm	Dimensions (mm)					N.W. kg
			A	H	K	P	T	
8-026-06	1.12	6	6	19	100	29	15	0.5
8-026-07	2.0	7, 8	9	24	119	34	20	0.8
8-026-10	3.15	10	11	30	143	44	26	1.4
8-026-13	5.3	13	14	39	179	52	30	2.9
8-026-16	8.0	16	18	49	212	60	36	5.6
8-026-20	12.5	18, 20	21	62	243	90	48	9.0
8-026-22	15.0	22	24	63	273	80	49	13.0

★ Design factor 4:1 proof tested and certified  
Tested acc. to EN 1677